

## 3.10 PhotoPrism. Alternativa a las nubes de fotos



*Imagen obtenida de <https://www.photoprism.app/>*

### Esta herramienta sirve para...

gestionar tu contenido multimedia de un modo avanzado. Haciendo uso de la demo <https://demo.photoprism.app/library/browse> podrás hacerte una idea de sus posibilidades.

### Web de proyecto y otros enlaces de interés

Web: <https://www.photoprism.app/>

Repositorio: <https://github.com/photoprism/photoprism>

# Puesta en marcha

Como en ocasiones anteriores vamos a hacer con docker-compose para ello accedemos al terminal y escribimos

```
cd $HOME
mkdir photoprism
cd photoprism
nano docker-compose.yml
```

y dentro del fichero copiaremos el siguiente contenido (adaptado del fichero visto en <https://dl.photoprism.app/docker/docker-compose.yml> ):

```
version: '3.5'

services:
  photoprism:
    image: photoprism/photoprism:latest
    depends_on:
      - mariadb
    ## Don't enable automatic restarts until PhotoPrism has been properly configured and
    tested!
    ## If the service gets stuck in a restart loop, this points to a memory, filesystem,
    network, or database issue:
    ## https://docs.photoprism.app/getting-started/troubleshooting/#fatal-server-errors
    # restart: unless-stopped
    security_opt:
      - seccomp:unconfined
      - apparmor:unconfined
    ports:
      - "2342:2342" # HTTP port (host:container)
    environment:
      PHOTOPRISM_ADMIN_USER: "admin" # superadmin username
      PHOTOPRISM_ADMIN_PASSWORD: "insecure" # initial superadmin password (minimum 8
      characters)
      PHOTOPRISM_AUTH_MODE: "password" # authentication mode (public, password)
```

```

PHOTOPRISM_SITE_URL: "http://photoprism.me:2342/" # server URL in the format
"http(s)://domain.name(:port)/(path)"
PHOTOPRISM_ORIGINALS_LIMIT: 5000 # file size limit for originals in MB
(increase for high-res video)
PHOTOPRISM_HTTP_COMPRESSION: "gzip" # improves transfer speed and bandwidth
utilization (none or gzip)
PHOTOPRISM_LOG_LEVEL: "info" # log level: trace, debug, info, warning,
error, fatal, or panic
PHOTOPRISM_READONLY: "false" # do not modify originals directory
(reduced functionality)
PHOTOPRISM_EXPERIMENTAL: "false" # enables experimental features
PHOTOPRISM_DISABLE_CHOWN: "false" # disables updating storage permissions
via chmod and chown on startup
PHOTOPRISM_DISABLE_WEBDAV: "false" # disables built-in WebDAV server
PHOTOPRISM_DISABLE_SETTINGS: "false" # disables settings UI and API
PHOTOPRISM_DISABLE_TENSORFLOW: "false" # disables all features depending on
TensorFlow
PHOTOPRISM_DISABLE_FACES: "false" # disables face detection and recognition
(requires TensorFlow)
PHOTOPRISM_DISABLE_CLASSIFICATION: "false" # disables image classification (requires
TensorFlow)
PHOTOPRISM_DISABLE_RAW: "false" # disables indexing and conversion of RAW
files
PHOTOPRISM_RAW_PRESETS: "false" # enables applying user presets when
converting RAW files (reduces performance)
PHOTOPRISM_JPEG_QUALITY: 85 # a higher value increases the quality
and file size of JPEG images and thumbnails (25-100)
PHOTOPRISM_DETECT_NSFW: "false" # automatically flags photos as private
that MAY be offensive (requires TensorFlow)
PHOTOPRISM_UPLOAD_NSFW: "true" # allows uploads that MAY be offensive
(no effect without TensorFlow)
# PHOTOPRISM_DATABASE_DRIVER: "sqlite" # SQLite is an embedded database that
doesn't require a server
PHOTOPRISM_DATABASE_DRIVER: "mysql" # use MariaDB 10.5+ or MySQL 8+ instead
of SQLite for improved performance
PHOTOPRISM_DATABASE_SERVER: "mariadb:3306" # MariaDB or MySQL database server

```

```
(hostname:port)
    PHOTOPRISM_DATABASE_NAME: "photoprism"           # MariaDB or MySQL database schema name
    PHOTOPRISM_DATABASE_USER: "photoprism"          # MariaDB or MySQL database user name
    PHOTOPRISM_DATABASE_PASSWORD: "insecure"        # MariaDB or MySQL database user password
    PHOTOPRISM_SITE_CAPTION: "AI-Powered Photos App"
    PHOTOPRISM_SITE_DESCRIPTION: ""                 # meta site description
    PHOTOPRISM_SITE_AUTHOR: ""                      # meta site author
working_dir: "/photoprism" # do not change or remove
## Storage Folders: "~" is a shortcut for your home directory, "." for the current
directory
  volumes:
    # "/host/folder:/photoprism/folder"             # Example
    - "~/Pictures:/photoprism/originals"           # Original media files (DO NOT
REMOVE)
    # - "/example/family:/photoprism/originals/family" # *Additional* media folders can be
mounted like this
    # - "~/Import:/photoprism/import"               # *Optional* base folder from which
files can be imported to originals
    - "./storage:/photoprism/storage"              # *Writable* storage folder for
cache, database, and sidecar files (DO NOT REMOVE)

## Database Server (recommended)
## see https://docs.photoprism.app/getting-started/faq/#should-i-use-sqlite-mariadb-or-mysql
mariadb:
  ## If MariaDB gets stuck in a restart loop, this points to a memory or filesystem issue:
  ## https://docs.photoprism.app/getting-started/troubleshooting/#fatal-server-errors
  restart: unless-stopped
  image: mariadb:10.10
  security_opt: # see https://github.com/MariaDB/mariadb-docker/issues/434#issuecomment-
1136151239
    - seccomp:unconfined
    - apparmor:unconfined
  command: mysqld --innodb-buffer-pool-size=512M --transaction-isolation=READ-COMMITTED --
character-set-server=utf8mb4 --collation-server=utf8mb4_unicode_ci --max-connections=512 --
innodb-rollback-on-timeout=OFF --innodb-lock-wait-timeout=120
  ## Never store database files on an unreliable device such as a USB flash drive, an SD
```

card, or a shared network folder:


volumes:

```
- "./database:/var/lib/mysql" # DO NOT REMOVE
```

environment:

```
MARIADB_AUTO_UPGRADE: "1"
MARIADB_INITDB_SKIP_TZINFO: "1"
MARIADB_DATABASE: "photoprism"
MARIADB_USER: "photoprism"
MARIADB_PASSWORD: "insecure"
MARIADB_ROOT_PASSWORD: "insecure"
```


como en ocasiones anteriores, para guardar los cambios pulsaremos `control + x` y cuando nos pregunte aceptaremos. Una vez volvamos a estar en el terminal, escribiremos `docker compose up -d` para lanzar los servicios ubicados dentro del fichero docker-compose. Le va a costar un buen rato extraer las imágenes y empezar el despliegue, paciencia. El resultado será similar al siguiente:

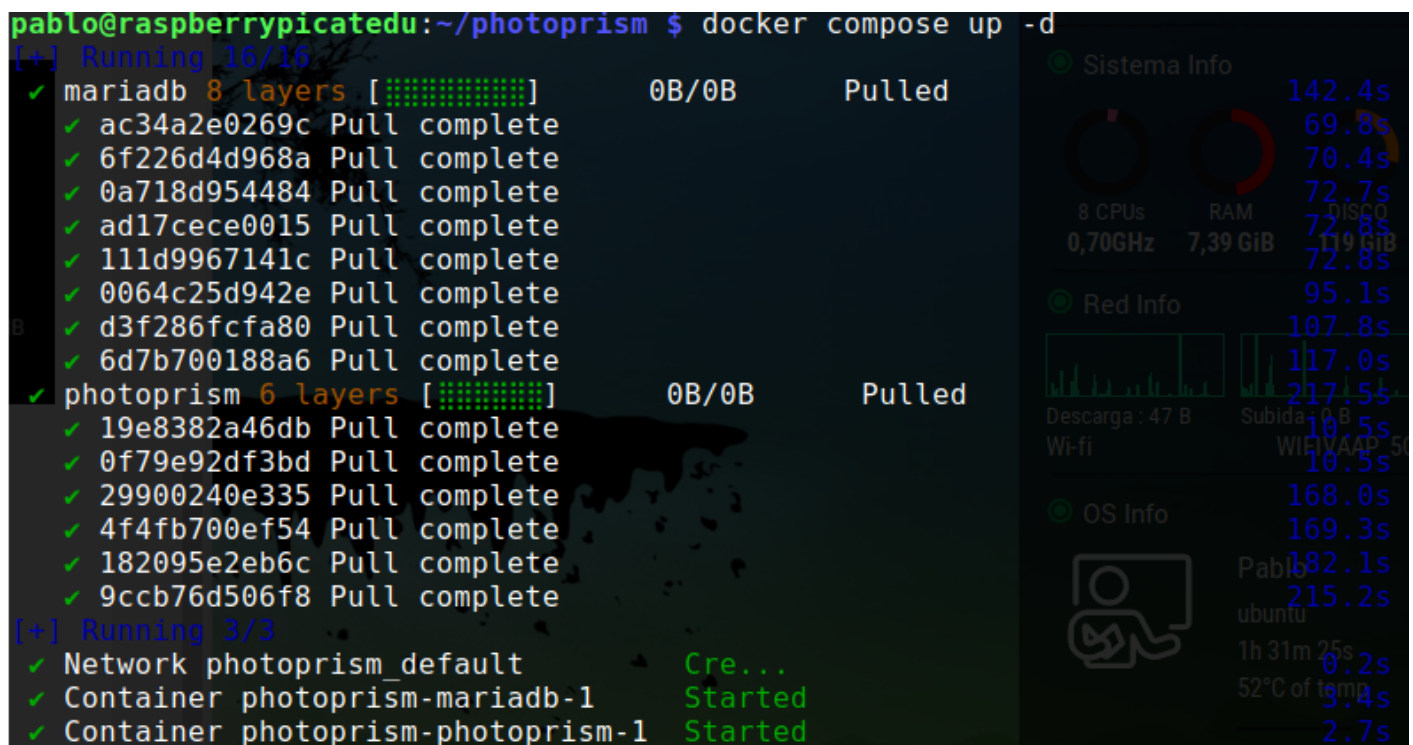

```
pablo@raspberrypicatedu:~/photoprism $ docker compose up -d
[+] Running 16/16
 ✓ mariadb 8 layers [██████████] 0B/0B Pulled
 ✓ ac34a2e0269c Pull complete
 ✓ 6f226d4d968a Pull complete
 ✓ 0a718d954484 Pull complete
 ✓ ad17cece0015 Pull complete
 ✓ 111d9967141c Pull complete
 ✓ 0064c25d942e Pull complete
 ✓ d3f286fcfa80 Pull complete
 ✓ 6d7b700188a6 Pull complete
 ✓ photoprism 6 layers [██████████] 0B/0B Pulled
 ✓ 19e8382a46db Pull complete
 ✓ 0f79e92df3bd Pull complete
 ✓ 29900240e335 Pull complete
 ✓ 4f4fb700ef54 Pull complete
 ✓ 182095e2eb6c Pull complete
 ✓ 9ccb76d506f8 Pull complete
[+] Running 3/3
 ✓ Network photoprism_default Cre...
 ✓ Container photoprism-mariadb-1 Started
 ✓ Container photoprism-photoprism-1 Started
```

*Elaboración propia*

Se paciente, le cuesta un par de minutos arrancar. Si tras esa breve pausa accedemos al servicio como venimos haciendo, en este caso en el puerto 2342, veremos algo similar a:

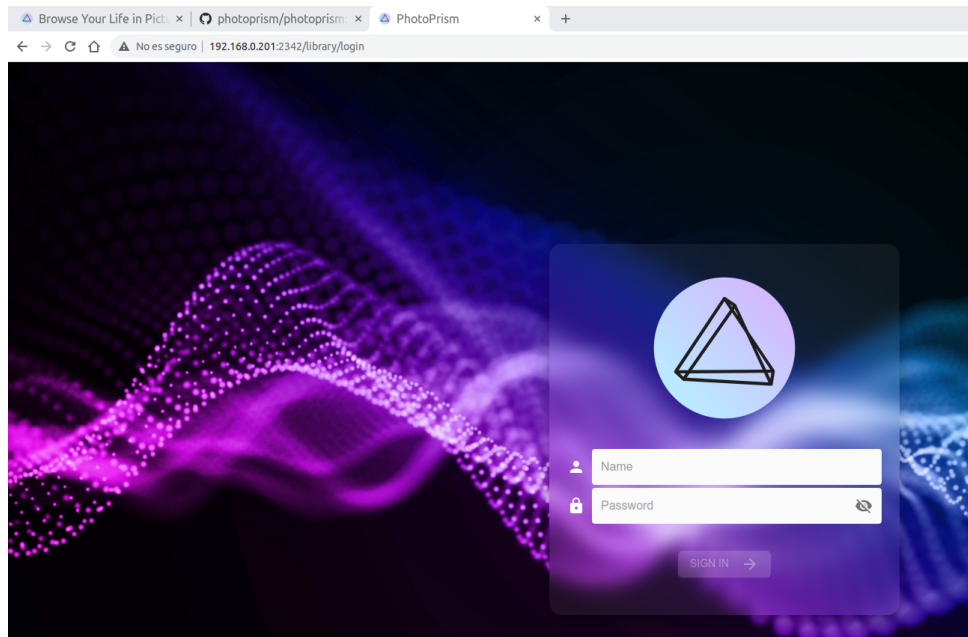

*Elaboración propia*

El usuario y contraseña por defecto son `admin` y `insecure`. Fíjate que vienen establecidos en el fichero `docker-compose`.

Este servicio está al límite en cuanto a la capacidad de la Raspberry Pi 4 modelo B de 4 GB. Valora si la solución que hemos visto en el capítulo anterior es suficiente para ti.

Revision #10

Created 2023-02-04 10:07:33 CET by Pablo Ruiz

Updated 2023-07-20 17:49:35 CEST by Pablo Ruiz