

## 3.14 Paperless-ngx. Gestión documental



*Imagen obtenida de <https://docs.paperless-ngx.com/>*

### Esta herramienta sirve para...

la gestión documental. Al igual que vimos con PaperMerge, cuenta con OCR.

### Web de proyecto y otros enlaces de interés

Web del proyecto: <https://docs.paperless-ngx.com/>

Repositorio en github: <https://github.com/paperless-ngx/paperless-ngx>

### Despliegue

En esta ocasión vamos a variar ligeramente la forma de realizar el despliegue. Dentro del repositorio, la empresa desarrolladora ha creado un script que automatiza la instalación vía docker-compose y, dado que queremos simplicidad, haremos uso del mismo

Cuidado con ejecutar cualquier script que encontréis en internet pues podría ser malicioso.

Vamos allá, accedemos al terminal y escribimos:

```
cd $HOME
mkdir paperless
cd paperless
```

y ahora si, lanzamos el script del siguiente modo

```
bash -c "$(curl -L https://raw.githubusercontent.com/paperless-ngx/paperless-ngx/main/install-paperless-ngx.sh)"
```

aparecerá un asistente que nos irá realizando una serie de preguntas para configurar el servicio y que tendrá un aspecto similar a este (remarco en un cuadrado rojo lo que he ido respondiendo):

```
pi@mediacenter:~/paperless$ bash -c "$(curl -L https://raw.githubusercontent.com/paperless-ngx/paperless-ngx/main/install-paperless-ngx.sh)"
% Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
           Dload  Upload  Total   Spent    Left     Speed
100 11122  100 11122    0     0  37197      0 --:--:-- --:--:-- --:--:-- 37197
/usr/bin/docker-compose

#####
###  paperless-ngx docker installation  ###
#####

This script will download, configure and start paperless-ngx.

1. Application configuration
=====

The URL paperless will be available at. This is required if the
installation will be accessible via the web, otherwise can be left blank.
Example: https://paperless.example.com
URL []:

The port on which the paperless webserver will listen for incoming
connections.
Port [8000]:

Paperless requires you to configure the current time zone correctly.
Otherwise, the dates of your documents may appear off by one day,
depending on where you are on earth.
Example: Europe/Berlin
See here for a list: https://en.wikipedia.org/wiki/List_of_tz_database_time_zones
Current time zone [Europe/Madrid]:

Database backend: PostgreSQL, MariaDB, and SQLite are available. Use PostgreSQL
if unsure. If you're running on a low-power device such as Raspberry
Pi, use SQLite to save resources.
Database backend (postgres sqlite mariadb) [postgres]: sqlite

Paperless is able to use Apache Tika to support Office documents such as
Word, Excel, Powerpoint, and Libreoffice equivalents. This feature
requires more resources due to the required services.
Enable Apache Tika? (yes no) [no]: no
```

Specify the default language that most of your documents are written in.  
Use ISO 639-2, (T) variant language codes:  
[https://www.loc.gov/standards/iso639-2/php/code\\_list.php](https://www.loc.gov/standards/iso639-2/php/code_list.php)  
Common values: eng (English) deu (German) nld (Dutch) fra (French)  
This can be a combination of multiple languages such as deu+eng

OCR language [eng]: es

**usa "spa" en lugar de "es" (sin las comillas)**

Specify the user id and group id you wish to run paperless as.  
Paperless will also change ownership on the data, media and consume  
folder to the specified values, so it's a good idea to supply the user id  
and group id of your unix user account.  
If unsure, leave default.

User ID [1000]:

Group ID [1000]:

## 2. Folder configuration

=====

The target folder is used to store the configuration files of  
paperless. You can move this folder around after installing paperless.  
You will need this folder whenever you want to start, stop, update or  
maintain your paperless instance.

Target folder [/home/pi/paperless/paperless-ngx]:

The consume folder is where paperless will search for new documents.  
Point this to a folder where your scanner is able to put your scanned  
documents.

CAUTION: You must specify an absolute path starting with / or a relative  
path starting with ./ here. Examples:

/mnt/consume

./consume

Consume folder [/home/pi/paperless/paperless-ngx/consume]:

The media folder is where paperless stores your documents.  
Leave empty and docker will manage this folder for you.  
Docker usually stores managed folders in /var/lib/docker/volumes.

CAUTION: If specified, you must specify an absolute path starting with /  
or a relative path starting with ./ here.

Media folder []: /mnt/Expansion/docs

The data folder is where paperless stores other data, such as your SQLite database, the search index and other data.  
As with the media folder, leave empty to have this managed by docker.

CAUTION: If specified, you must specify an absolute path starting with / or a relative path starting with ./ here.

Data folder []:

### 3. Login credentials

=====

Specify initial login credentials. You can change these later.  
A mail address is required, however it is not used in paperless. You don't need to provide an actual mail address.

Paperless username [pi]:

Paperless password:

Paperless password (again):

Email [pi@localhost]: pablorui:

### Summary

=====

Target folder: /home/pi/paperless/paperless-ngx

Consume folder: /home/pi/paperless/paperless-ngx/consume

Media folder: /mnt/Expansion/docs

Data folder: Managed by docker

URL:

Port: 8000

Database: sqlite

Tika enabled: no

OCR language: es

User id: 1000

Group id: 1000

Paperless username: pi

Paperless email: pabloruiz.com

Press any key to install.

```

Press any key to install.
Installing paperless...
--2023-03-11 10:53:31-- https://raw.githubusercontent.com/paperless-ngx/paperless-ngx/main/docker/compose/docker-compose.sqlite.yml
Resolviendo raw.githubusercontent.com (raw.githubusercontent.com)... 185.199.111.133, 185.199.109.133, 185.199.108.133, ...
Conectando con raw.githubusercontent.com (raw.githubusercontent.com)[185.199.111.133]:443... conectado.
Petición HTTP enviada, esperando respuesta... 200 OK
Longitud: 1840 (1,8K) [text/plain]
Grabando a: 0:docker-compose.yml0
docker-compose.yml 100%[=====] 1,80K --.-KB/s en 0s
2023-03-11 10:53:32 (6,20 MB/s) - 0:docker-compose.yml0 guardado [1840/1840]
--2023-03-11 10:53:32-- https://raw.githubusercontent.com/paperless-ngx/paperless-ngx/main/docker/compose/.env
Resolviendo raw.githubusercontent.com (raw.githubusercontent.com)... 185.199.108.133, 185.199.110.133, 185.199.111.133, ...
Conectando con raw.githubusercontent.com (raw.githubusercontent.com)[185.199.108.133]:443... conectado.
Petición HTTP enviada, esperando respuesta... 200 OK
Longitud: 31 [text/plain]
Grabando a: 0:.env0
.env 100%[=====] 31 --.-KB/s en 0s
2023-03-11 10:53:32 (184 KB/s) - 0:.env0 guardado [31/31]
Pulling broker ... done
Pulling webserver ... done
Creating network "paperless_default" with the default driver
Creating volume "paperless_data" with default driver
Creating volume "paperless_redisdata" with default driver
Creating paperless_broker_1 ... done
Paperless-ngx docker container starting...
Installing languages...
Get:1 http://deb.debian.org/debian bullseye InRelease [116 kB]
Get:2 http://deb.debian.org/debian-security bullseye-security InRelease [48.4 kB]
Get:3 http://deb.debian.org/debian bullseye-updates InRelease [44.1 kB]
Get:4 http://deb.debian.org/debian bullseye/main arm64 Packages [8072 kB]
Get:5 http://deb.debian.org/debian-security bullseye-security/main arm64 Packages [230 kB]
Get:6 http://deb.debian.org/debian bullseye-updates/main arm64 Packages [12.0 kB]
Fetched 8922 kB in 8s (1126 kB/s)
Reading package lists... Done
Package tesseract-ocr-es not found! :(
Creating directory /usr/src/paperless/data/index
Creating directory /usr/src/paperless/media/documents
Creating directory /usr/src/paperless/media/documents/originals
Creating directory /usr/src/paperless/media/documents/thumbnails
Creating directory /tmp/paperless
Adjusting permissions of paperless files. This may take a while.
Waiting for Redis...
Connected to Redis broker.
Apply database migrations...

```

*Elaboración propia*

Una vez terminemos (le costará un buen rato), como en ocasiones anteriores, accederemos al servicio a través del navegador escribiendo `http://nuestra_ip_local:puerto` En mi caso es <http://192.168.0.201:8000>



The image shows the login interface of Paperless-ngx. At the top is the Paperless-ngx logo, which consists of a green leaf icon and the text "Paperless-ngx". Below the logo, the text "Por favor, inicie sesión" (Please log in) is displayed. There are two input fields: the first is labeled "pi" and contains the text "pi"; the second is labeled "Contraseña" (Password) and is currently empty. Below these fields is a blue button with the text "Iniciar sesión" (Log in).


*Elaboración propia*

Si tienes problemas para acceder vuelve al terminal y escribe `docker-compose run --rm webserver createsuperuser` te pedirá que introduzcas un nuevo usuario y contraseña. A continuación tira el

servicio con `docker-compose down` y cuando termine vuelve a levantarlo con `docker-compose up -d` . Con esto deberías poder acceder sin problema.


# Funcionamiento

La primera vez que accedas verás un aspecto similar al siguiente:

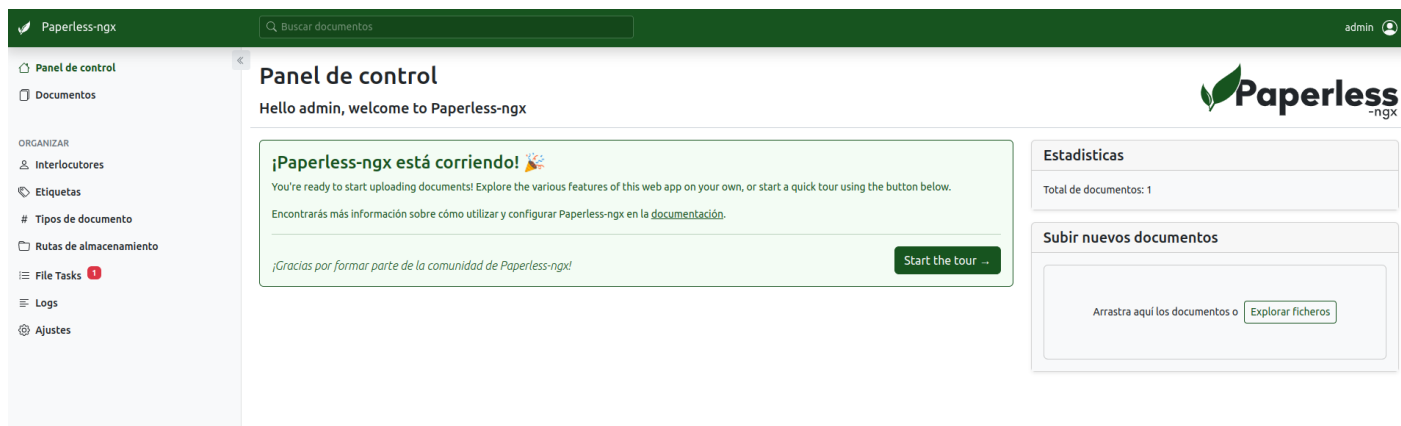

*Elaboración propia*

La herramienta tiene muchas posibilidades pero quizás lo mas interesante sea acceder a la sección documentos y allí arrastrar aquellos documentos que nos interese conservar (nóminas, facturas de la luz/gas/teléfono,...) Muchos de estos documentos están accesibles mientras somos clientes de una compañía pero dejan de estar a nuestro alcance cuando dejamos de ser clientes y, en ocasiones, nos pueden resultar de utilidad. En la imagen posterior he arrastrado una nómina

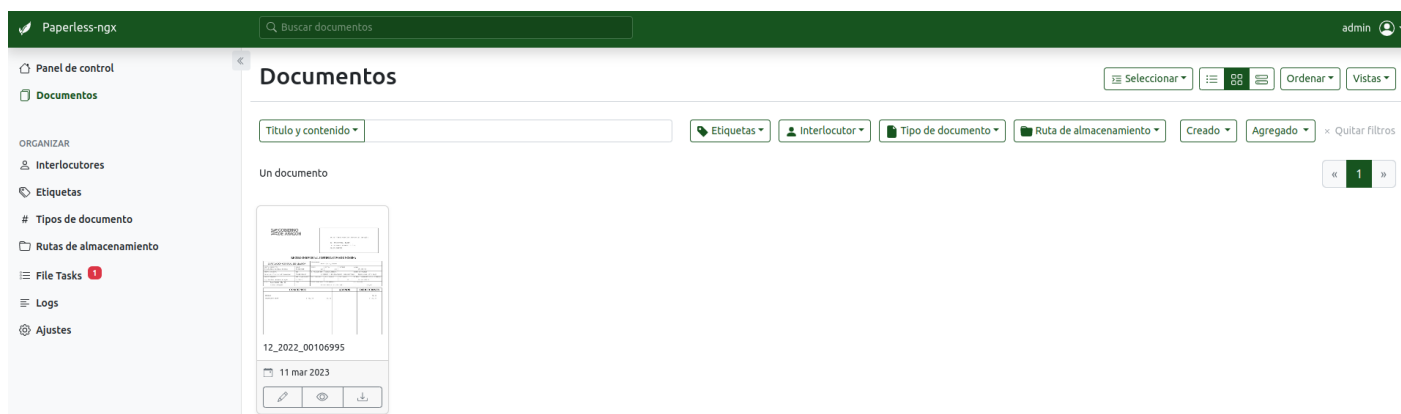

*Elaboración propia*

La potencia de la herramienta reside en que gracias a OCR y el sistema de etiquetas que incluye podemos ir almacenando documentos de modo que en el futuro resulte muy fácil encontrar la documentación que nos interese. Así, si en el ejemplo anterior, pulsamos en el lápiz que aparece justo del documento subido a modo de ejemplo podremos configurar una serie de parámetros:



# 12\_2022\_00106995

Detalles

Contenido

Metadatos

Comentarios

Título

12\_2022\_00106995

Número de serie del archivo

+1

Fecha de creación

11/03/2023



Interlocutor

DGA



+

Tipo de documento

Nóminas



+

Ruta de almacenamiento

Por defecto



+

Etiquetas



nómina



suelo



+

Descartar

Salvar

CE

Di

CE

Se

CE

Di

DI

*Elaboración propia*

Una vez clasificados los documentos podemos utilizar el buscador superior o el ubicado en documentos par localizar aquella información que nos interese.



Este servicio es también bastante exigente para el hardware que incorpora una Raspberry Pi modelo 4. De todos modos, recuerda que lo que estamos haciendo con docker y docker-compose sobre la Raspberry Pi puedes replicarlo en cualquier otro sistema operativo que permita su ejecución y con un hardware mas potente.

Revision #6

Created 14 February 2023 21:24:14 by Pablo Ruiz

Updated 11 March 2023 11:56:31 by Pablo Ruiz